




Element Configuration: Elements can be U-bends, W-bends and foldback design depending on the requirements of the application.


Selection and Sizing
See Page 11-107

Installation and Wiring
See Page 11-111


Standard Designs
See Page 11-113

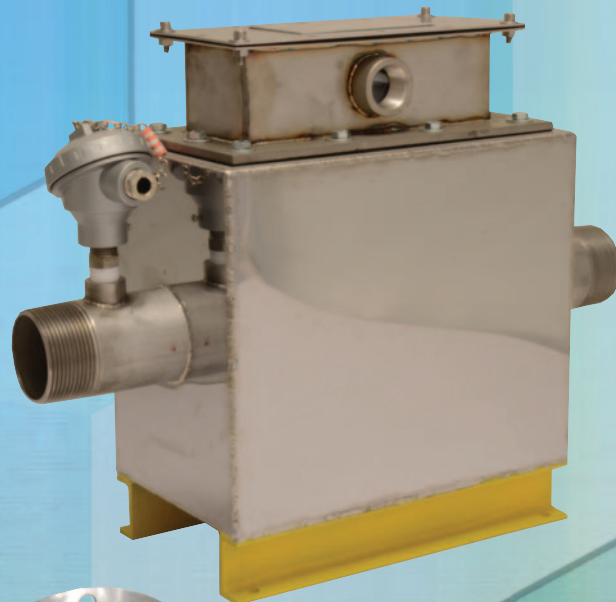

Custom Designs

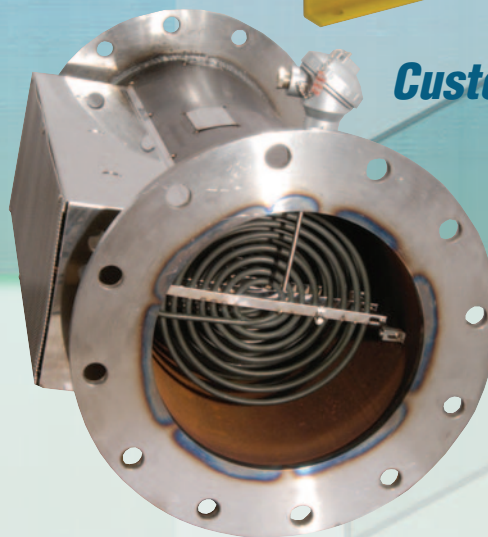

Duct Heater System: Tempco can supply the heater and blower assembled, ready for connection to the application duct work. The pictured 48KW, 480V unit produces 1500 CFM of heated air to dry metal parts after being coated with a rust inhibitor.

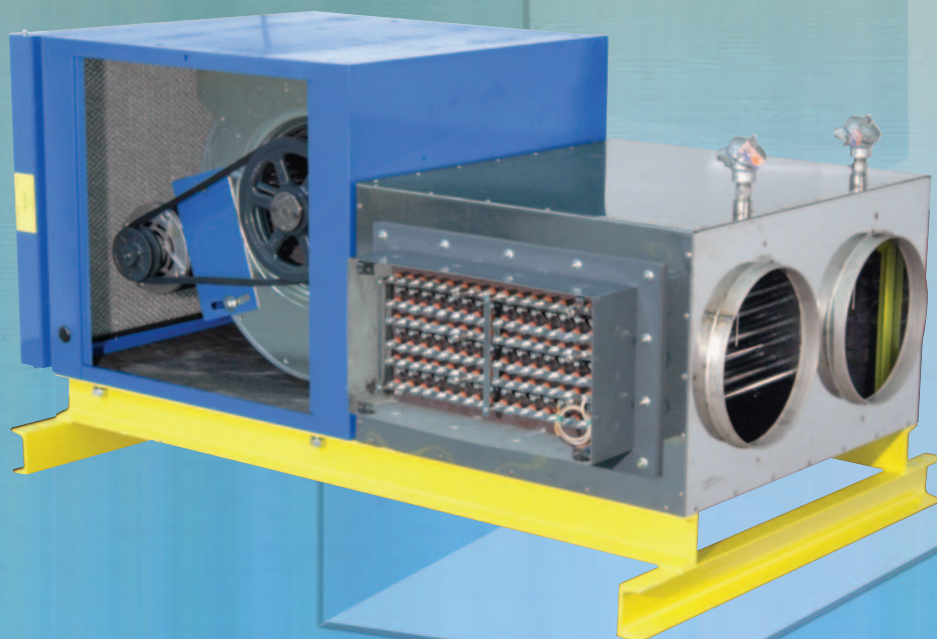

Complete Your Thermal Loop System with a Tempco Power/Temperature Control Panel.
See pages 13-56 through 13-63.

(800) 323-6859 • Email: sales@tempco.com