


Ceramic Fiber Cylindrical Heaters



Standard (Non-Stock) Full Cylindrical Shaped High-Temperature Ceramic Fiber Heaters (1100°C Construction Style)

All Dimensions are in inches. Lead Locations A and C are approximate. Complete the part number by adding the required lead location number.

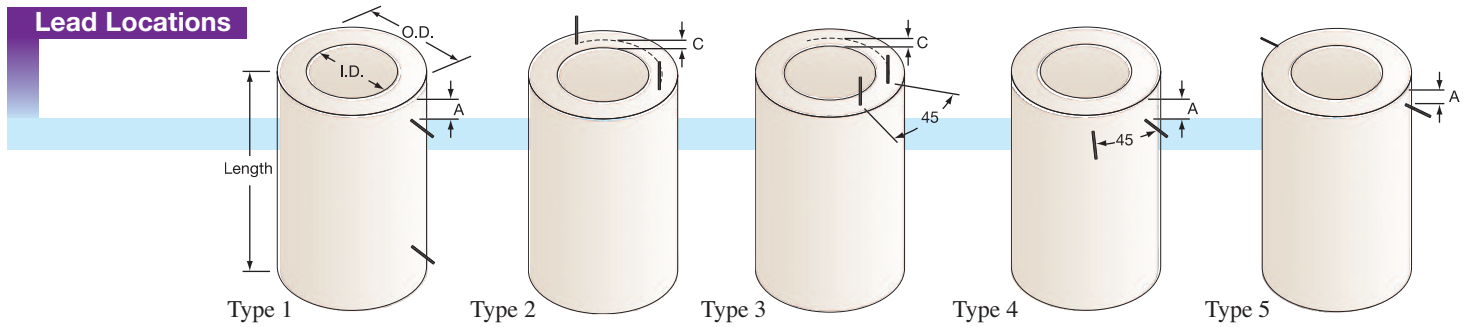

Note: See page 4-2 for maximum temperature guidelines

| I.D. | O.D. | Length | Watts | Volts | Lead Location | | Part Number |
|------|------|--------|-------|-------|---------------|-----|----------------------------------|
| | | | | | A | C | |
| 1.5 | 3.5 | 12.0 | 600 | 120 | 1.5 | 0.5 | CFR3004 <input type="checkbox"/> |
| 2.0 | 5.0 | 6.0 | 400 | 60 | 1.0 | 0.8 | CFR3005 <input type="checkbox"/> |
| 2.0 | 5.0 | 12.0 | 800 | 120 | 1.5 | 0.8 | CFR3006 <input type="checkbox"/> |
| 3.0 | 6.0 | 6.0 | 600 | 120 | 1.0 | 0.8 | CFR3007 <input type="checkbox"/> |
| 3.0 | 6.0 | 12.0 | 1200 | 120 | 1.5 | 0.8 | CFR3008 <input type="checkbox"/> |
| 4.0 | 8.0 | 6.0 | 800 | 120 | 1.0 | 1.0 | CFR3009 <input type="checkbox"/> |
| 4.0 | 8.0 | 12.0 | 1600 | 120 | 1.5 | 1.0 | CFR3010 <input type="checkbox"/> |
| 5.0 | 9.0 | 6.0 | 1000 | 120 | 1.0 | 1.0 | CFR3011 <input type="checkbox"/> |
| 5.0 | 9.0 | 12.0 | 2000 | 120 | 1.5 | 1.0 | CFR3012 <input type="checkbox"/> |
| 6.0 | 10.0 | 6.0 | 1200 | 120 | 1.0 | 1.0 | CFR3013 <input type="checkbox"/> |
| 6.0 | 10.0 | 12.0 | 2400 | 120 | 1.5 | 1.0 | CFR3014 <input type="checkbox"/> |
| 6.0 | 10.0 | 18.0 | 3500 | 240 | 2.0 | 1.0 | CFR3015 <input type="checkbox"/> |
| 8.0 | 12.0 | 6.0 | 1600 | 120 | 1.0 | 1.0 | CFR3016 <input type="checkbox"/> |
| 8.0 | 12.0 | 12.0 | 3100 | 240 | 1.5 | 1.0 | CFR3017 <input type="checkbox"/> |
| 10.0 | 16.0 | 6.0 | 2000 | 120 | 1.0 | 1.5 | CFR3019 <input type="checkbox"/> |
| 10.0 | 16.0 | 12.0 | 3900 | 240 | 1.5 | 1.5 | CFR3020 <input type="checkbox"/> |
| 10.0 | 16.0 | 18.0 | 5900 | 240 | 2.0 | 1.5 | CFR3021 <input type="checkbox"/> |
| 12.0 | 18.0 | 12.0 | 4700 | 240 | 1.5 | 1.5 | CFR3023 <input type="checkbox"/> |
| 12.0 | 18.0 | 18.0 | 7100 | 240 | 2.0 | 1.5 | CFR3024 <input type="checkbox"/> |
| 14.0 | 20.0 | 18.0 | 8200 | 240 | 2.0 | 1.5 | CFR3026 <input type="checkbox"/> |
| 18.0 | 24.0 | 12.0 | 7100 | 240 | 1.5 | 2.0 | CFR3028 <input type="checkbox"/> |



Standard Full Cylindrical Shaped Heater
8" I.D. × 12" O.D. × 6" Long

Ordering Information

Standard Units

Select a **Full Cylindrical Shaped Heater** by size and electrical rating from the table above. To complete the part number add the required lead location number.

For example

CFR3004 has Type 2 Leads.

Standard leads are double twist 9" long high-temperature bare wire.

Custom Designed/Manufactured Full Cylindrical Shaped Heaters

Custom manufactured Full Cylindrical Shaped Ceramic Fiber Heaters are available; consult **Tempco** with your requirements. **Standard lead time is 4 weeks.**

Please Specify the following:

- 1100°C or 1200°C Construction Style
- Length
- Inner Diameter
- Outer Diameter
- Wattage
- Voltage
- Lead Location and Type

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.