
Industrial Process Heaters

Silicone Rubber Drum Heaters



Silicone Rubber Drum and Pail Heaters

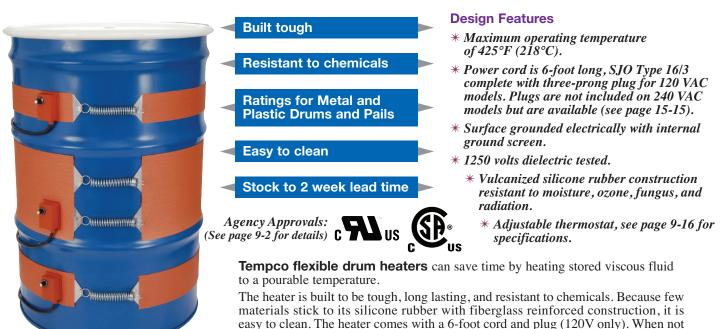

in use, it rolls for convenient storage.

The total wattage (number of heaters) and the material being heated inside of the drum must be considered when determining the actual temperature to which that specific material can be heated.

250 Ambient Temperature 60°F Drum filled with water 240 3 Heaters 230 220 210 200 Ľ. Drum Content Temperature 190 2 Heaters 180 170 160 150 140 1 Heater 130 120 110 100 90 80 70 60 2 4 6 8 10 12 14 16 18 20 22 24 0 Time in Hours

Drum Size	Drum Dia.	Heater Width	Heater Length	Watts	Part Number 120V 240V		Thermostat
5 Gal. 15 Gal. 30 Gal. 55 Gal. 5 Gal.	11.5 13.5 18 22.5 11.5	3" 3" 3" 3"	31" 38" 52" 64" 31"	300 500 750 1000 300	DHR00150 DHR00110 DHR00070 DHR00020 DHR00140	DHR01010 DHR00130 DHR00090 DHR00040 DHR01041	50-425°F 50-425°F 50-425°F 50-425°F 50-425°F No
15 Gal.	13.5	3"	38"	500	DHR00100	DHR00120	No
30 Gal.	18	3"	52"	750	DHR00060	DHR00080	No
55 Gal.	22.5	3"	64"	1000	DHR00010	DHR00030	No
5 Gal.	11.5	4"	31"	550	DHR01014	DHR01018	50-425°F
15 Gal.	13.5	4"	38"	700	DHR01013	DHR01017	50-425°F
30 Gal.	18	4"	52"	1000	DHR01012	DHR01016	50-425°F
55 Gal.	22.5	4"	64"	1500	DHR00050	DHR00055	50-425°F
5 Gal.	11.5	9.5"	31"	1000	DHR01023	DHR01047	70-190°F
15 Gal.	13.5	9.5"	38"	1000	DHR01024	DHR01046	70-190°F
55 Gal.	22.5	9.5"	64"	1500	DHR01025	DHR01045	70-190°F

Standard (Non-Stock) and Stock Drum Heaters for Metal Drums Stock Items Are Shown In RED

Standard (Non-Stock) and Stock Drum Heaters for Plastic Pails Stock Items Are Shown In RED

Drum Size	Drum Dia.	Heater Width	Heater Length	Watts		umber 240V	Thermostat
5 Gal.	11.5	4"	31"	150	DHR01034	DHR01044	50-160°F
15 Gal.	13.5	4"	38"	200	DHR01035	DHR01036	50-160°F
30 Gal.	18	4"	52"	250	DHR01037	DHR01038	50-160°F
55 Gal.	22.5	4"	64"	300	DHR01033	DHR01039	50-160°F
5 Gal.	11.5	9.5"	31"	300	DHR01027	DHR01043	70-140°F
55 Gal.	22.5	9.5"	64"	750	DHR01026	DHR01042	70-140°F

Standard lead time is Stock to 2 weeks.

View Product Inventory @ www.tempco.com

11-120 Rev 1 (12-2020)